


**The eGaN® Technology
Journey Continues**




EPC2088 Thermal Model

EPC2088 FEA thermal simulations

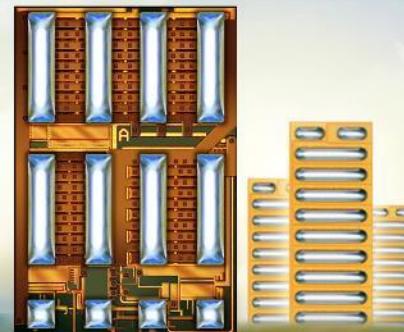

- The thermal model applies to EPC2088.
- A power dissipation of 1 W in the device active area is assumed.
- Finite element analysis (FEA) thermal simulations
 - $R_{\Theta JB}$ and $R_{\Theta JC}$ are obtained by stationary simulations.
 - $Z_{\Theta JB}$ and $Z_{\Theta JC}$ are obtained by transient simulations.
- R-C thermal model is generated.


EPC2088 geometry in simulation

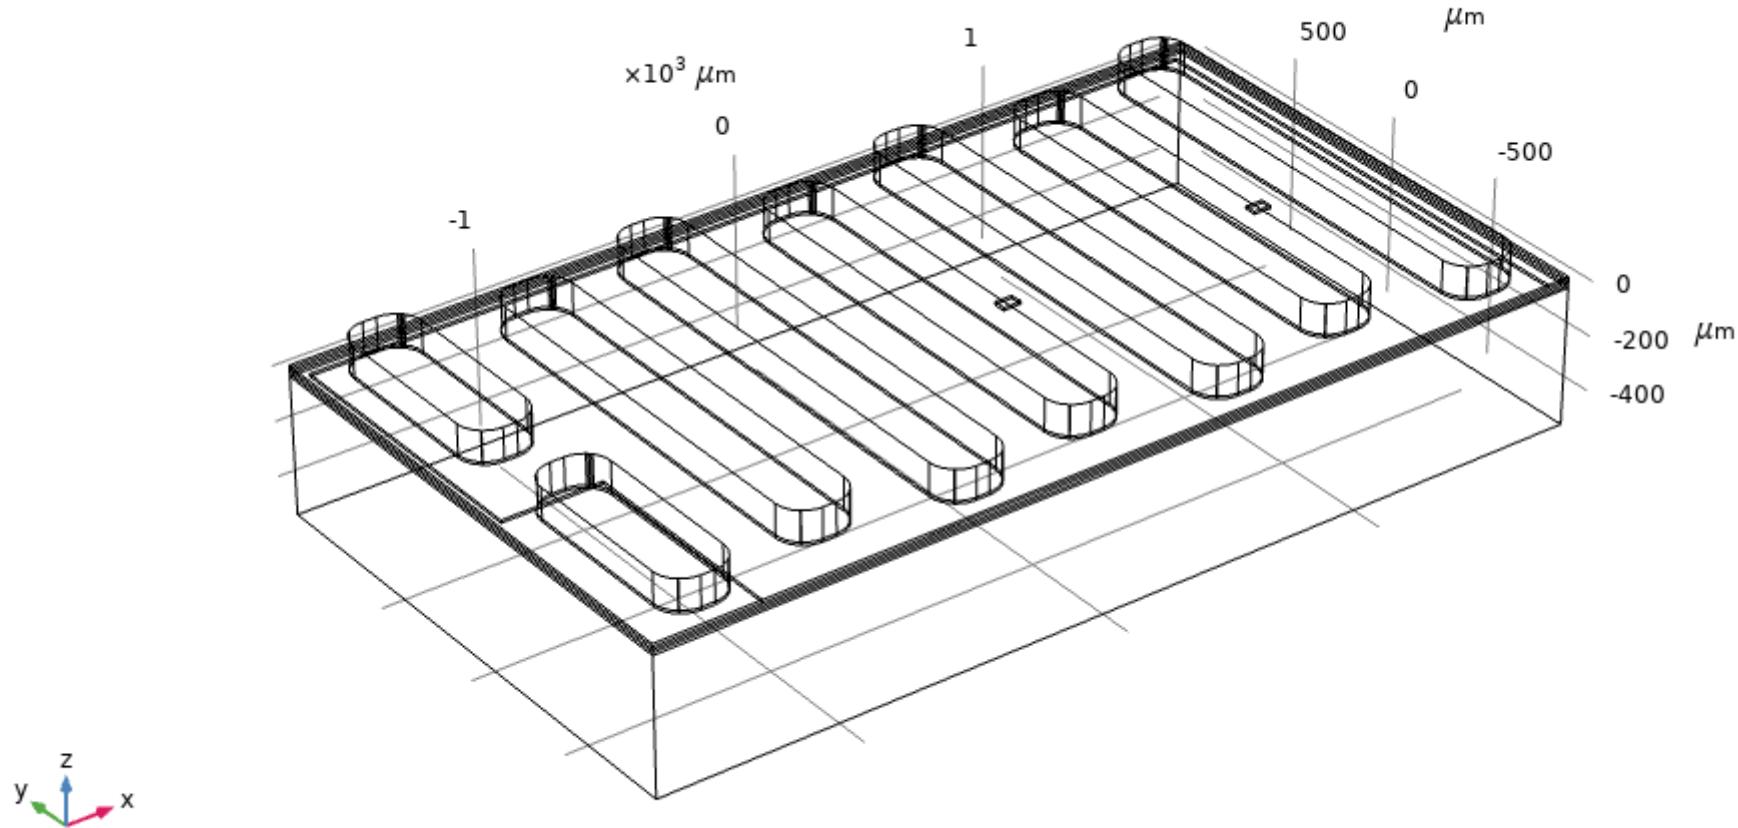

EPC2088 Steady-state $R_{\Theta JB}$



Typical $R_{\Theta JB} = 1.4 \text{ }^{\circ}\text{C/W}$

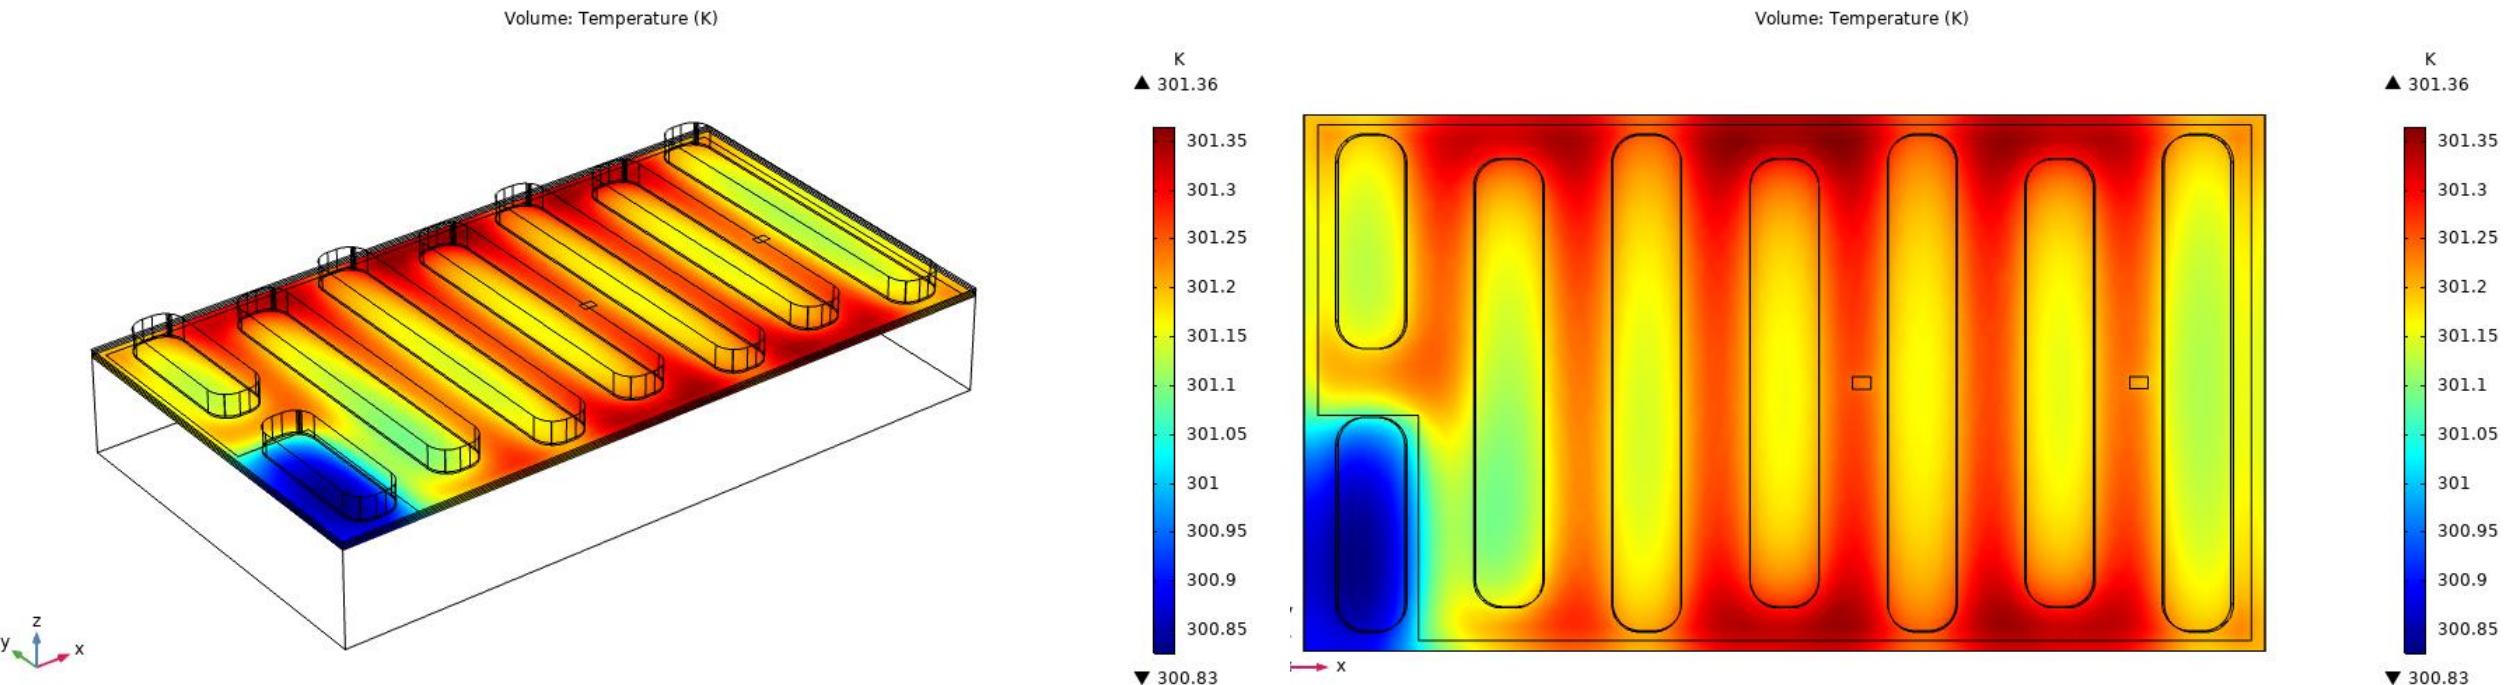


- Operating condition: Power = 1 W in the active area.
- Boundary condition: Temperature of top of solder bumps set to be 300 K.

EPC2088 Steady-state $R_{\Theta JC}$





Typical $R_{\Theta JC} = 0.5 \text{ }^{\circ}\text{C/W}$

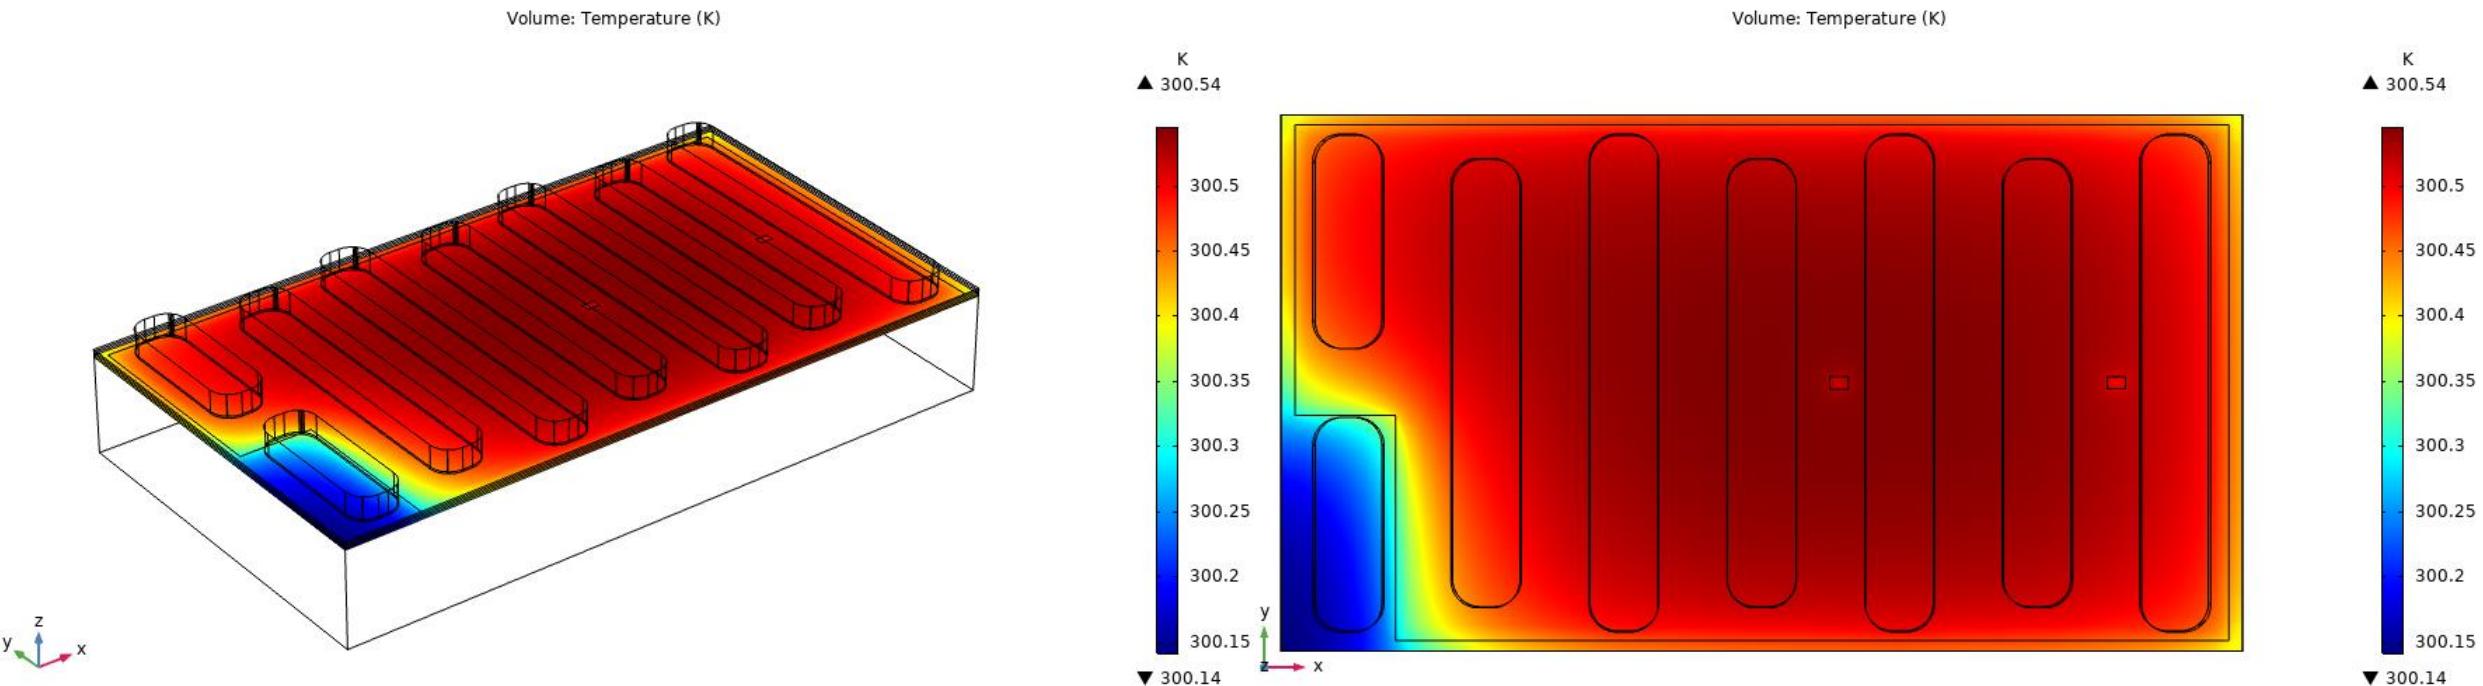

- Operating condition: Power = 1 W in the active area.
- Boundary condition: Temperature of the device backside set to be 300 K.

EPC2088 Z_{ΘJB} R-C thermal model

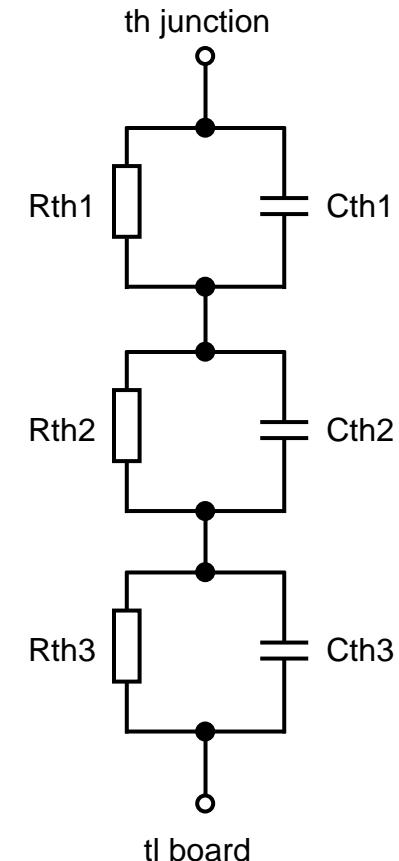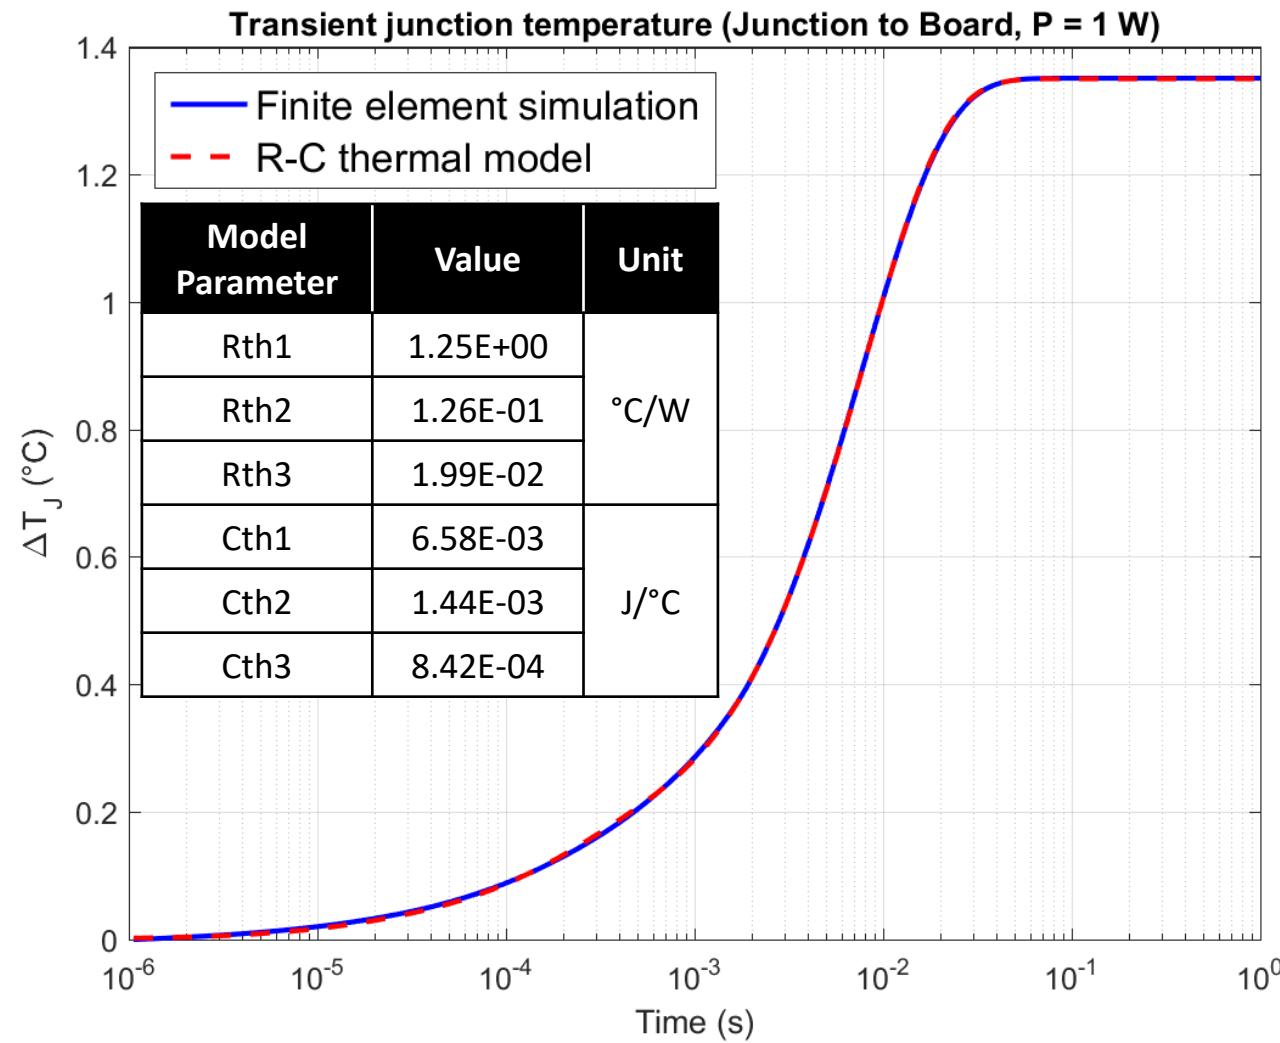

EPC2088 Z_{ΘJC} R-C thermal model

