

# eGaN® FETs and ICs for Brushless DC (BLDC) Motors




## Key Features

- 1/5 the size of silicon MOSFETs for the same  $R_{DS(on)}$
- Zero reverse recovery
- Lower switching losses
- Ruggedness for short circuit stress high  $dV/dt$  and small deadtime
- Integration simplifies design

## Key Benefits



- Miniaturization & low weight
- Higher battery efficiency
- Higher precision
- Reduced EMI
- Reliability
- High Frequency operation (100 kHz+)
  - Higher position accuracy
  - Lower current & torque ripple
  - Lower audible noise

## Applications

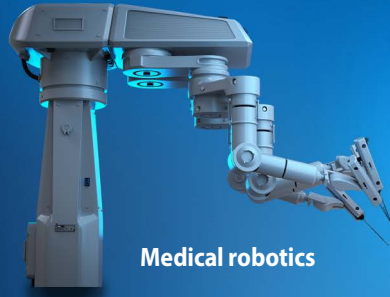

## 400 W Motor Drive Solution

- 48 V<sub>IN</sub>
- 3 phases
- 15 Apk/phase
- 98.5% efficiency @ 100 kHz

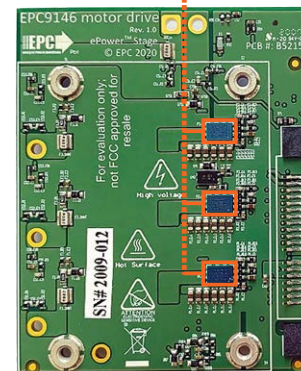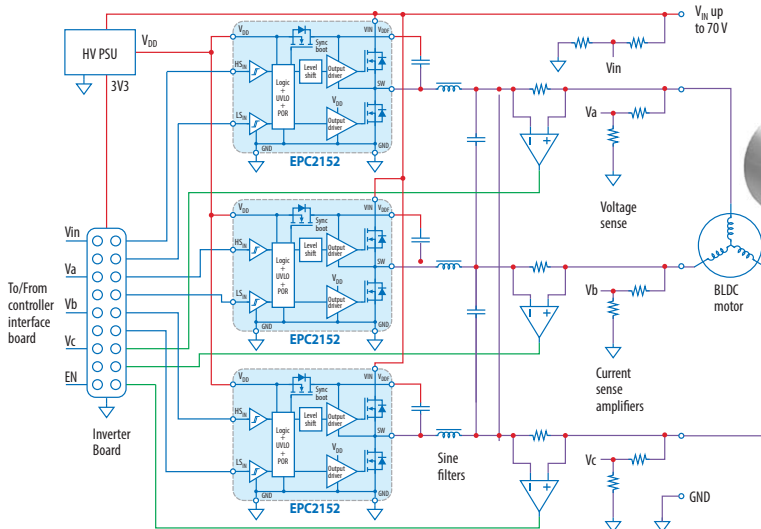

Interface board to microcontroller

- EPC9147A
- EPC9147B
- EPC9147C



Motor Drive

Part Number	Description	V <sub>IN</sub>	I <sub>Phase</sub> (A <sub>RMS</sub> )	f <sub>SW</sub> (kHz)	Featured Product
EPC9176	20 A <sub>RMS</sub> 3-Phase BLDC Motor Drive Reference Design Board	14–65	20	20–250	EPC23102
EPC9193	20 A <sub>RMS</sub> 3-Phase BLDC Motor Drive Reference Design Board	14–65	20	50–250	EPC2619
EPC9193HC	40 A <sub>RMS</sub> 3-Phase BLDC Motor Drive Reference Design Board	14–65	40	50–250	EPC2619
EPC9194	40 A <sub>RMS</sub> 3-Phase BLDC Motor Drive Reference Design Board	14–65	40	20–250	EPC2302
EPC9173	35 A <sub>RMS</sub> 3-Phase BLDC Motor Drive Reference Design Board	20–85	35	20–250	EPC23101
EPC9186	150 A <sub>RMS</sub> 3-Phase BLDC Motor Drive Reference Design Board	14–60	150	20–120	EPC2302

ePower™ Stage

Part Number	Configuration	Function	V	I <sub>OUT</sub>	I <sub>OUT</sub> Peak	V <sub>DD</sub>	Input Logic	F (Max)	UVLO	Package (mm)	Development Board
EPC2152	Half-Bridge ePower™ Stage	ePower™ Stage	80	12.5	90	12	3.3 V	3 MHz	7.5	LGA 3.9 x 2.6	EPC90120
EPC23101	HS FET + Driver + Level Shift	ePower™ Stage	100	65	240	6	5.5 V	3 MHz	0.5–4	QFN 3.5 x 5	EPC90142
EPC23102	HS FET + Driver + Level Shift	ePower™ Stage	100	35	140	6	5.5 V	3 MHz	0.5–4	QFN 3.5 x 5	EPC90147
EPC23103	HS FET + Driver + Level Shift	ePower™ Stage	100	25	61	6	3.3 V or 5 V	3 MHz		QFN 3.5 x 5	EPC90151
EPC23104	HS FET + Driver + Level Shift	ePower™ Stage	100	15	44	6	3.3 V or 5 V	3 MHz		QFN 3.5 x 5	EPC90152

Recommended Devices for Brushless DC (BLDC) Motors

Part Number	Configuration	V <sub>DS</sub> (V)	Max R <sub>DS(on)</sub> (mΩ) @ 5 V <sub>GS</sub>	Q <sub>G</sub> typ (nC)	Q <sub>GS</sub> typ (nC)	Q <sub>GD</sub> typ (nC)	Q <sub>OSS</sub> typ (nC)	Q <sub>RR</sub> (nC)	C <sub>ISS</sub> (pF)	C <sub>OSS</sub> (pF)	C <sub>RSS</sub> (pF)	I <sub>D</sub> (A)	Pulsed I <sub>D</sub> (A)	Max T <sub>J</sub> (°C)	Package (mm)	Development Board
EPC2102	Half Bridge	60	4.9	8	2.5	1.5	26 31	0	850	500 610	11	30	220	150	BGA 6.05 x 2.3	EPC9038
EPC2101	Half Bridge	60	11.5 2.8	3.3 13	1.1 3.9	0.5 2.2	9.3 45	0	300 1200	200 1000	5 25	10 40	80 350	150	BGA 6.05 x 2.3	EPC9037
EPC2039	Single	80	25	1.91	0.76	0.42	7.64	0	210	115	2	6.8	50	150	BGA 1.35 x 1.35	EPC9057
EPC2103	Half Bridge	80	5.5	6.5	2.2	1.1	30 34	0	730	445 525	7	30	195	150	BGA 6.05 x 2.3	EPC9039
EPC2105	Half Bridge	80	14.5 3.6	2.7 11	0.9 3	0.5 2.1	11 51	0	300 1170	170 780	3 12	10 40	70 300	150	BGA 6.05 x 2.3	EPC9034
EPC2252	Single–AEC-Q101	80	11	3.5	1	0.5	15	0	440	190	1.3	8.2	75	150	BGA 1.5 x 1.5	EPC9179
EPC2065	Single	80	3.6	9.4	2.6	1.7	33	0	1097	534	8.9	60	215	150	LGA 3.5 x 2	EPC90137
EPC2206	Single–AEC-Q101	80	2.2	15	4.1	3	72	0	1610	1100	15	90	390	150	LGA 6.05 x 2.3	EPC90122
EPC2106	Half Bridge	100	70	0.73	0.24	0.140	3.96 4.68	0	79	52 61	0.5	1.7	18	150	BGA 1.35 x 1.35	EPC9055
EPC2212	Single	100	13.5	3.2	0.9	0.6	18	0	339	238	3	18	75	150	LGA 2.1 x 1.6	n/a
EPC2104	Half Bridge	100	6.8	6.8	2.3	1.4	35 41	0	730	430 500	5	30	180	150	BGA 6.05 x 2.3	EPC9040
EPC2204	Single	100	6	5.7	1.8	0.8	25	0	644	304	2.3	29	125	150	LGA 2.5 x 1.5	EPC9097
EPC2306	Single	100	3.8	11.0		1.1	41	0	1544	482	3.4	48	197	150	QFN 3 x 5	EPC90145
EPC2619	Single	100	3.3	8.3	2.1	1	27	0	1180	310	3	29	164	150	LGA 2.5 x 1.5	EPC90153
EPC2088	Single	100	3.2	12.5	4.4	1.4	47	0	1864	557	3.6	60	231	150	LGA 3.5 x 1.95	EPC90123
EPC2071	Single	100	2.2	18	6	1.8	71	0	2664	878	5.4	64	350	150	LGA 4.45 x 2.3	EPC90146
EPC2302	Single	100	1.8	23	8	2.3	85	0	3200	1000	7	101	408	150	QFN 3 x 5	EPC90142
EPC2361	Single	100	1.0 (typ)	28	7.2	2.5	86	0	4094	1147	12	101	519	150	QFN 3 x 5	EPC90156
EPC2308	Single	150	6	11	3.8	1.3	50	0	1454	405	2.6	48	157	150	QFN 3 x 5	EPC90148
EPC2305	Single	150	4	21	6.3	2.6	105	0	2900	920	7	80	329	150	QFN 3 x 5	EPC90143
EPC2059	Single	170	9	5.7	1.3	0.9	35	0	633	267	1.6	24	102	150	LGA 2.8 x 1.4	EPC9098
EPC2207	Single	200	22	4.5	1.3	0.7	23	0	1400	130	0.7	14	54	150	LGA 2.8 x 0.9	EPC90124
EPC2307	Single	200	10	10.6		1.3	58	0	1401	326	1.2	48	130	150	QFN 3 x 5	EPC90150
EPC2215	Single	200	8	13.6	3.3	2.1	69	0	0	390	2	32	162	150	LGA 4.6 x 1.6	EPC9099
EPC2304	Single	200	5	21	0.0	2.6	115	0	2786	649	2.4	102	260	150	QFN 3 x 5	EPC90140

Table data subject to change. Please refer to the Product section on [epc-co.com/epc/Products/gan-fets-and-ics](http://epc-co.com/epc/Products/gan-fets-and-ics)



For More Information

Please contact [info@epc-co.com](mailto:info@epc-co.com) or your local sales representative

Visit our website: [epc-co.com](http://epc-co.com)

Sign-up to receive EPC updates at [bit.ly/EPCupdates](http://bit.ly/EPCupdates)



eGaN is a registered trademark of Efficient Power Conversion Corporation